

FIG. 1

RECEIVED SERVICE ATTRIBUTE TABLE


SERVICE NO.	ATTRIBUTE DEFINITION HEADER				
	b7	b6	b5	b0	
No. 1	1	0	0
No. 2	0	0	1
No. 3	0	1	0
No. 4	1	0	0
⋮	⋮	⋮	⋮

MEANING OF THE RESPECTIVE BITS
 OF ATTRIBUTE DEFINITION HEADER

- 7TH BIT b7 = 1 → INDICATING THAT THE SERVICE IS A FREE SERVICE
- 6TH BIT b6 = 1 → INDICATING THAT THE SERVICE IS A SUBSCRIBED PAY SERVICE
- 5TH BIT b5 = 1 → INDICATING THAT THE SERVICE IS A NON-SUBSCRIBED PAY SERVICE

FIG. 2

PROCESS OF SETTING A RECEIVED SERVICE SEARCH IDENTIFIER

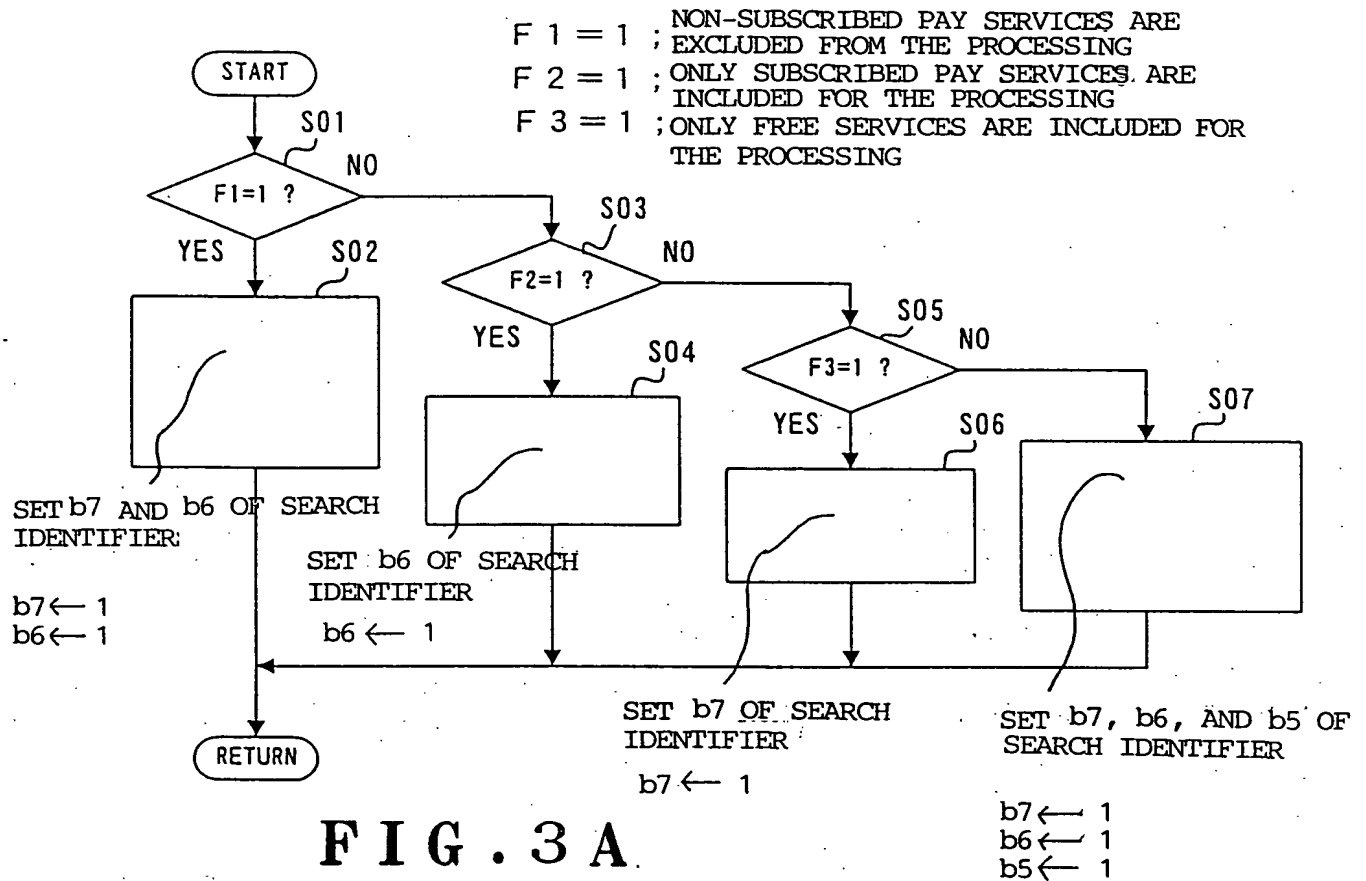

STRUCTURE OF RECEIVED SERVICE SEARCH IDENTIFIER

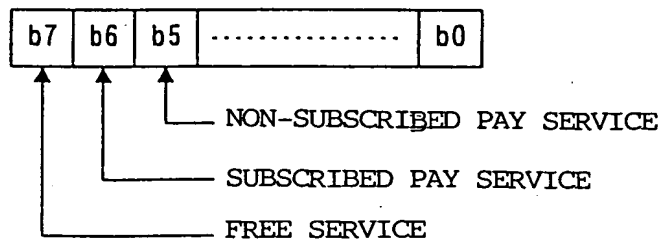


FIG. 3B

PROCESS OF SETTING
 RECEIVED SERVICE
 SEARCH IDENTIFIER

[SEARCH PROCESSING]

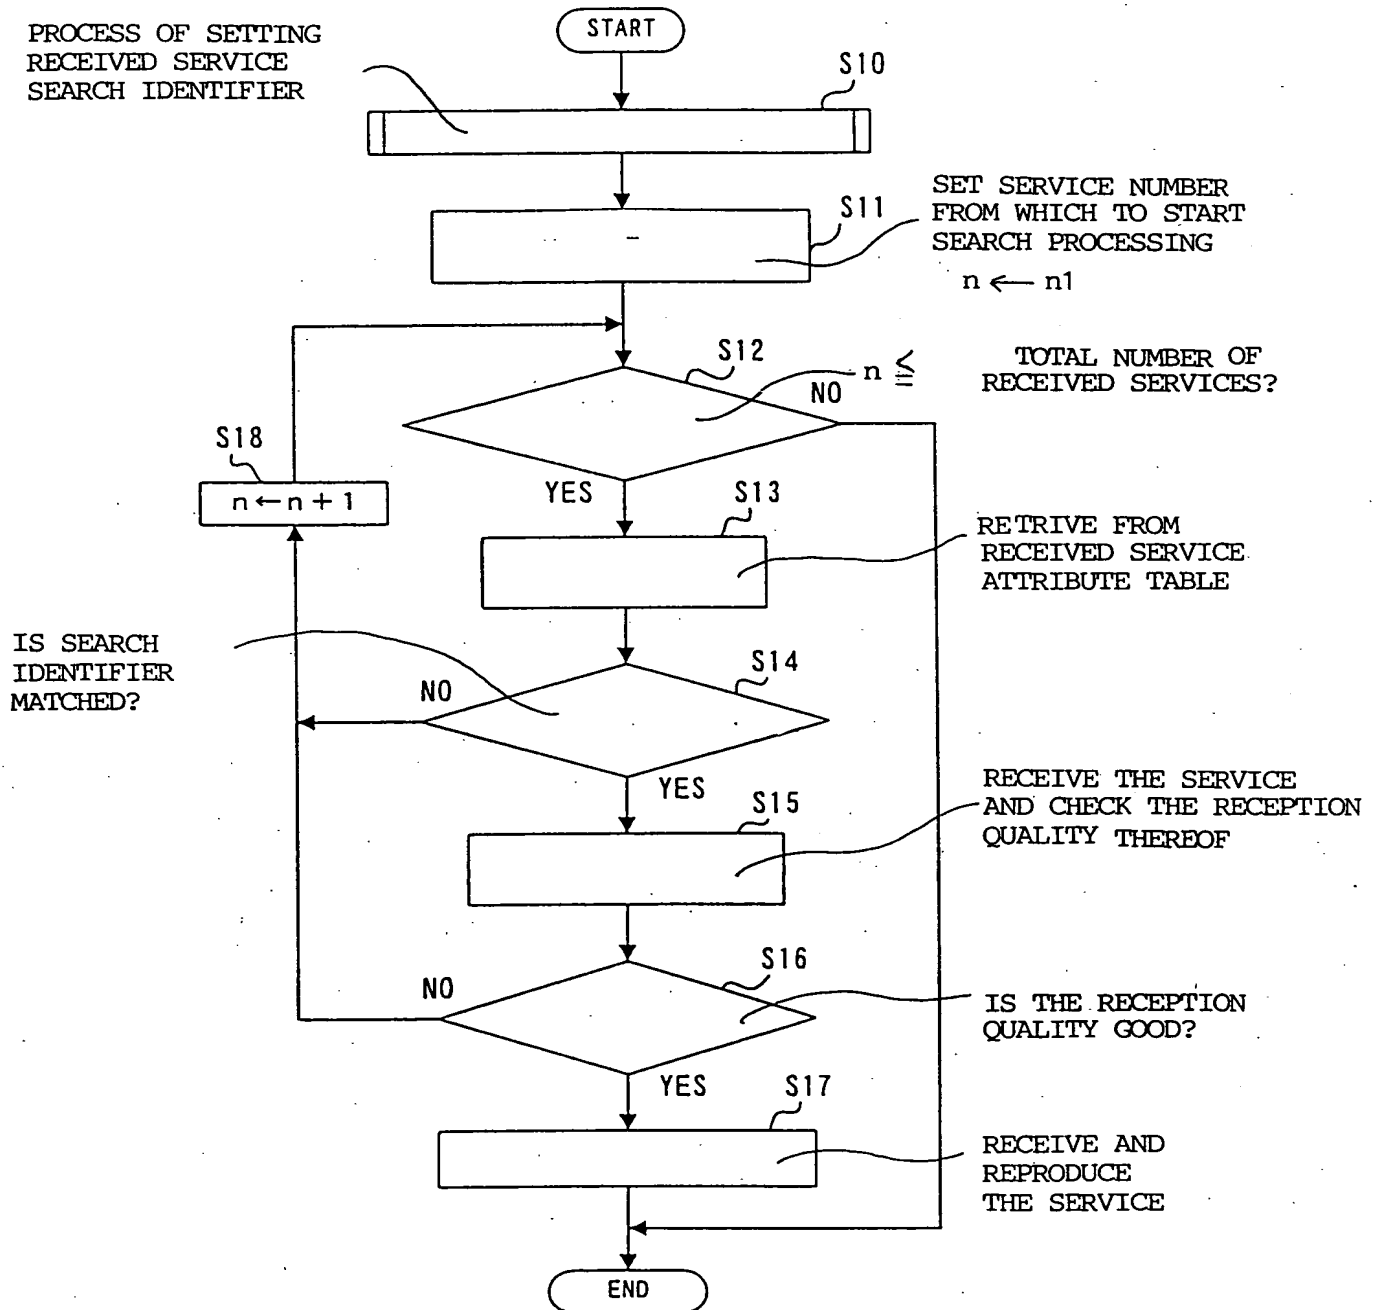


FIG. 4

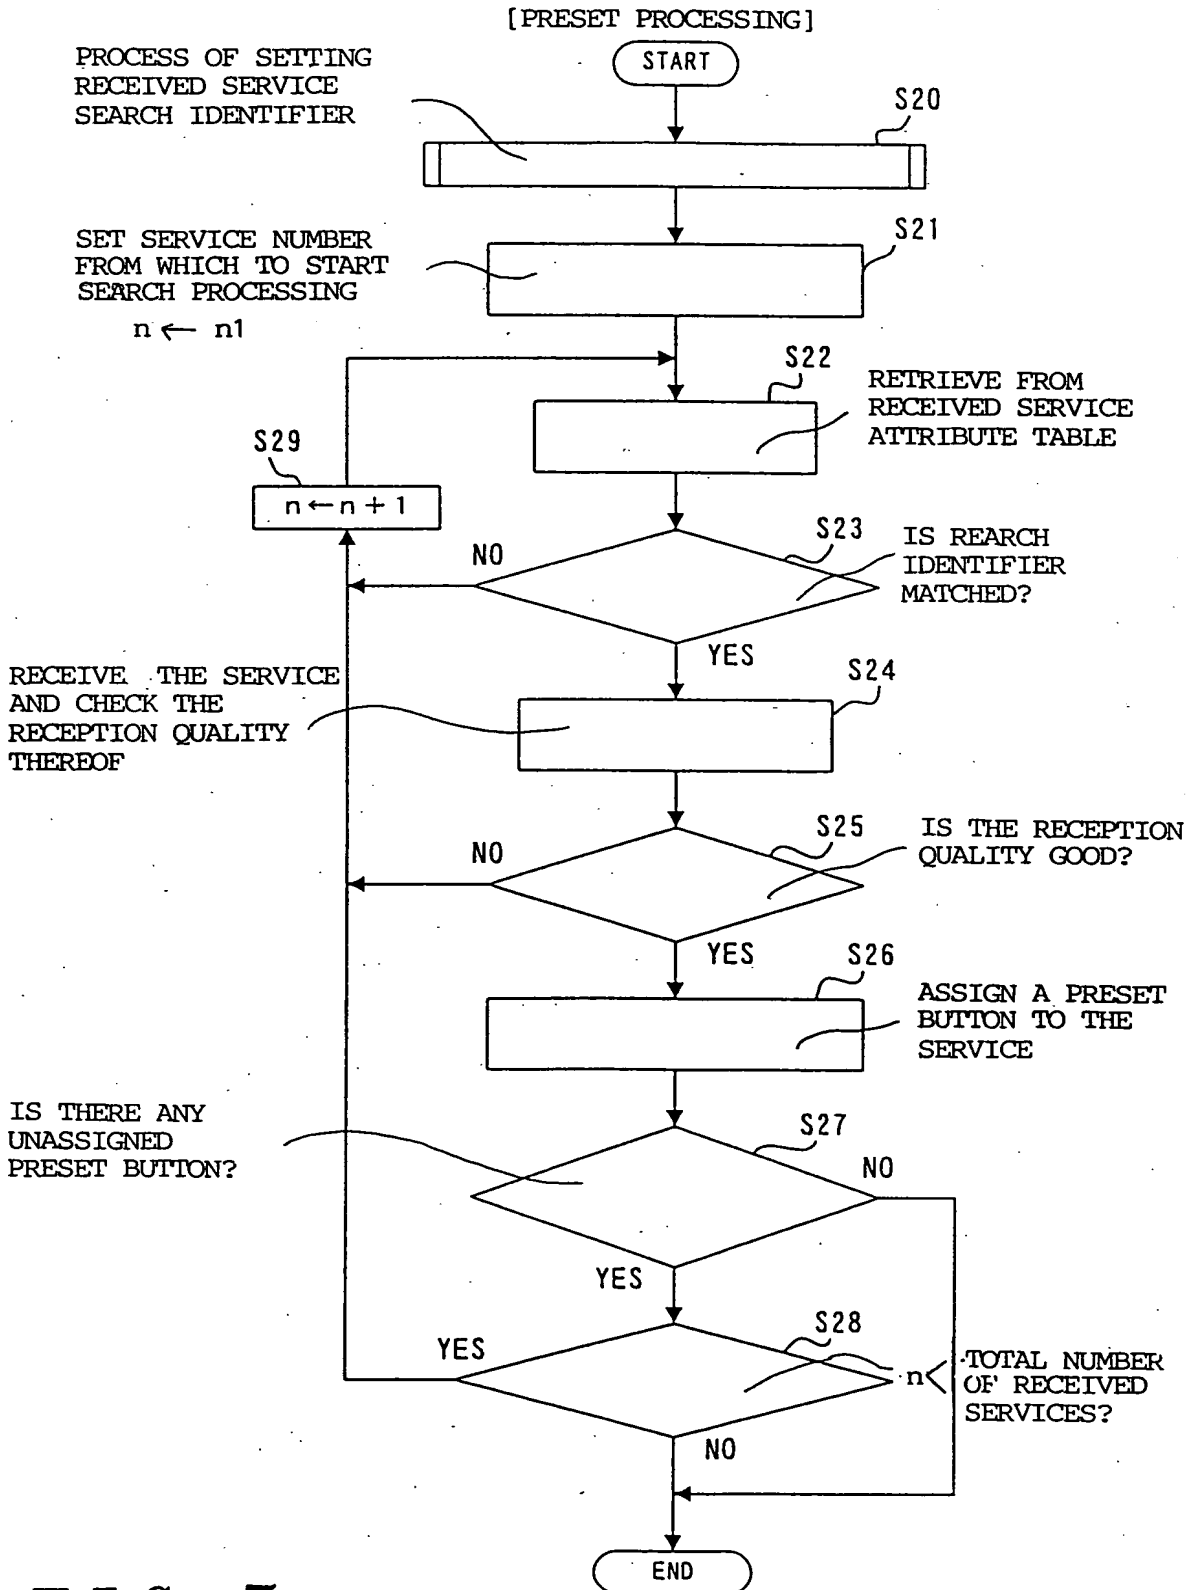


FIG. 5

FIG. 5

[SERVICE INFORMATION DISPLAY PROCESSING]

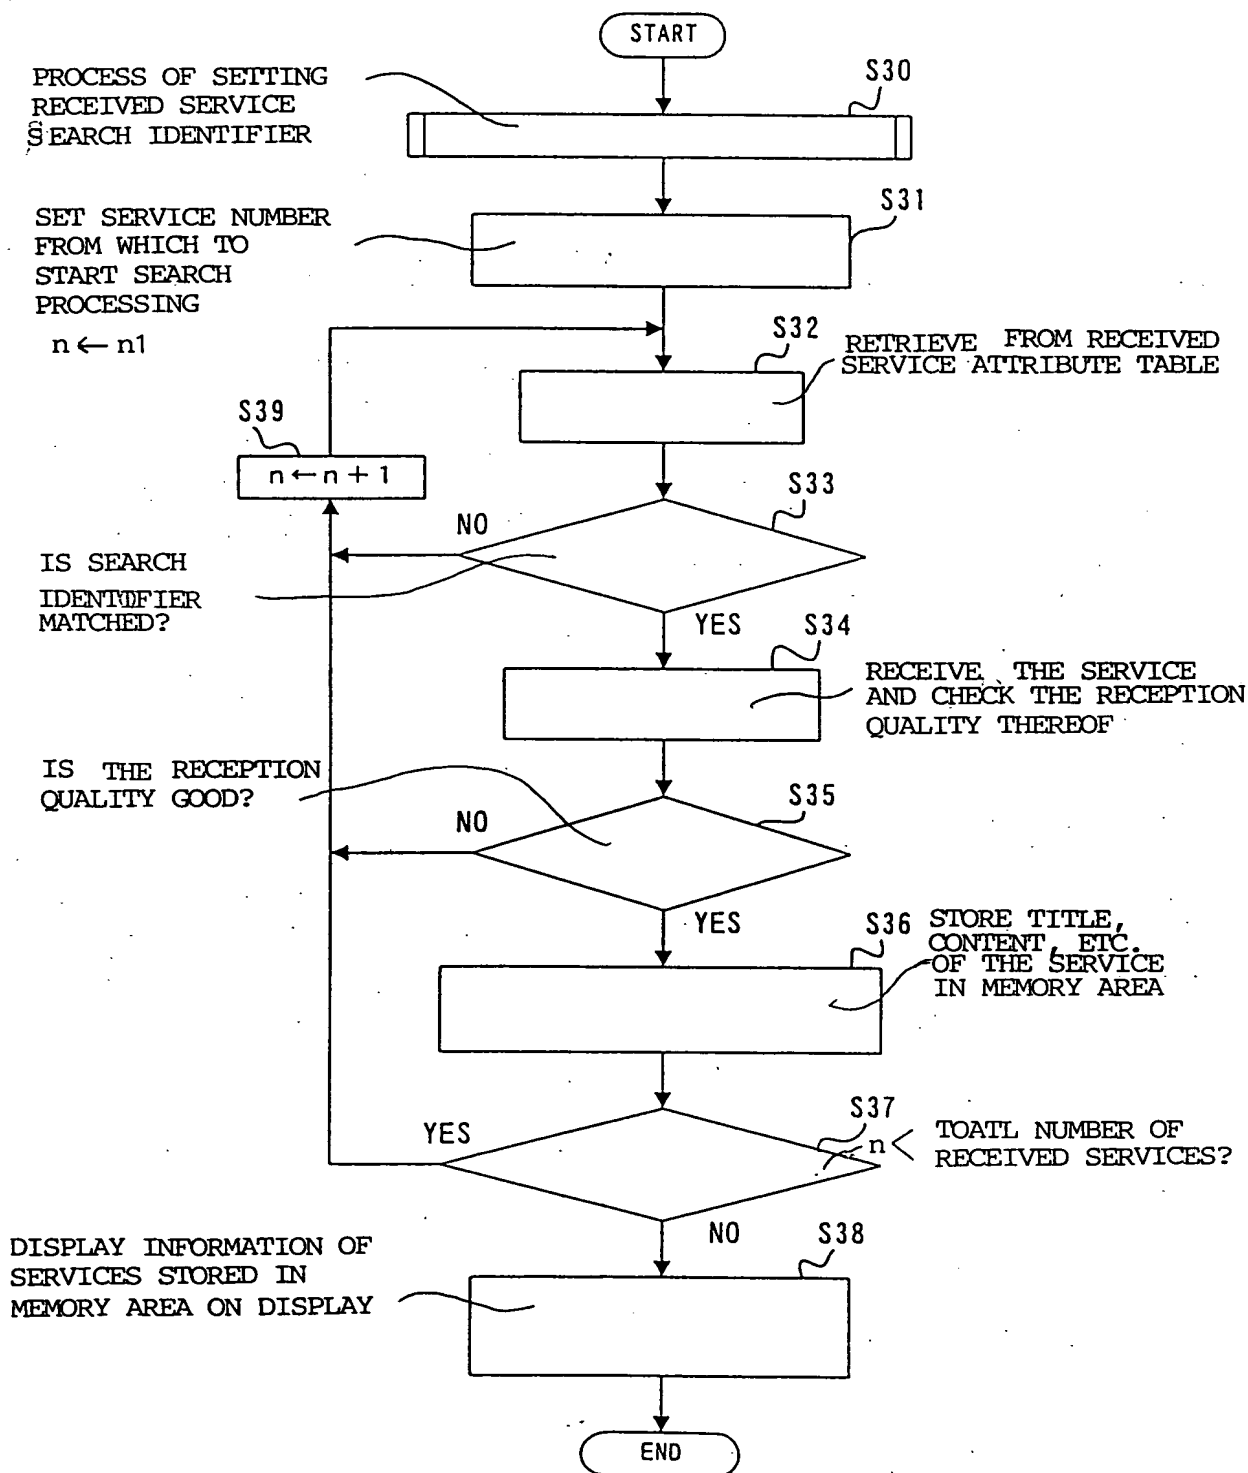


FIG. 6

[NEW SUBSCRIPTION SEARCH PROCESSING]

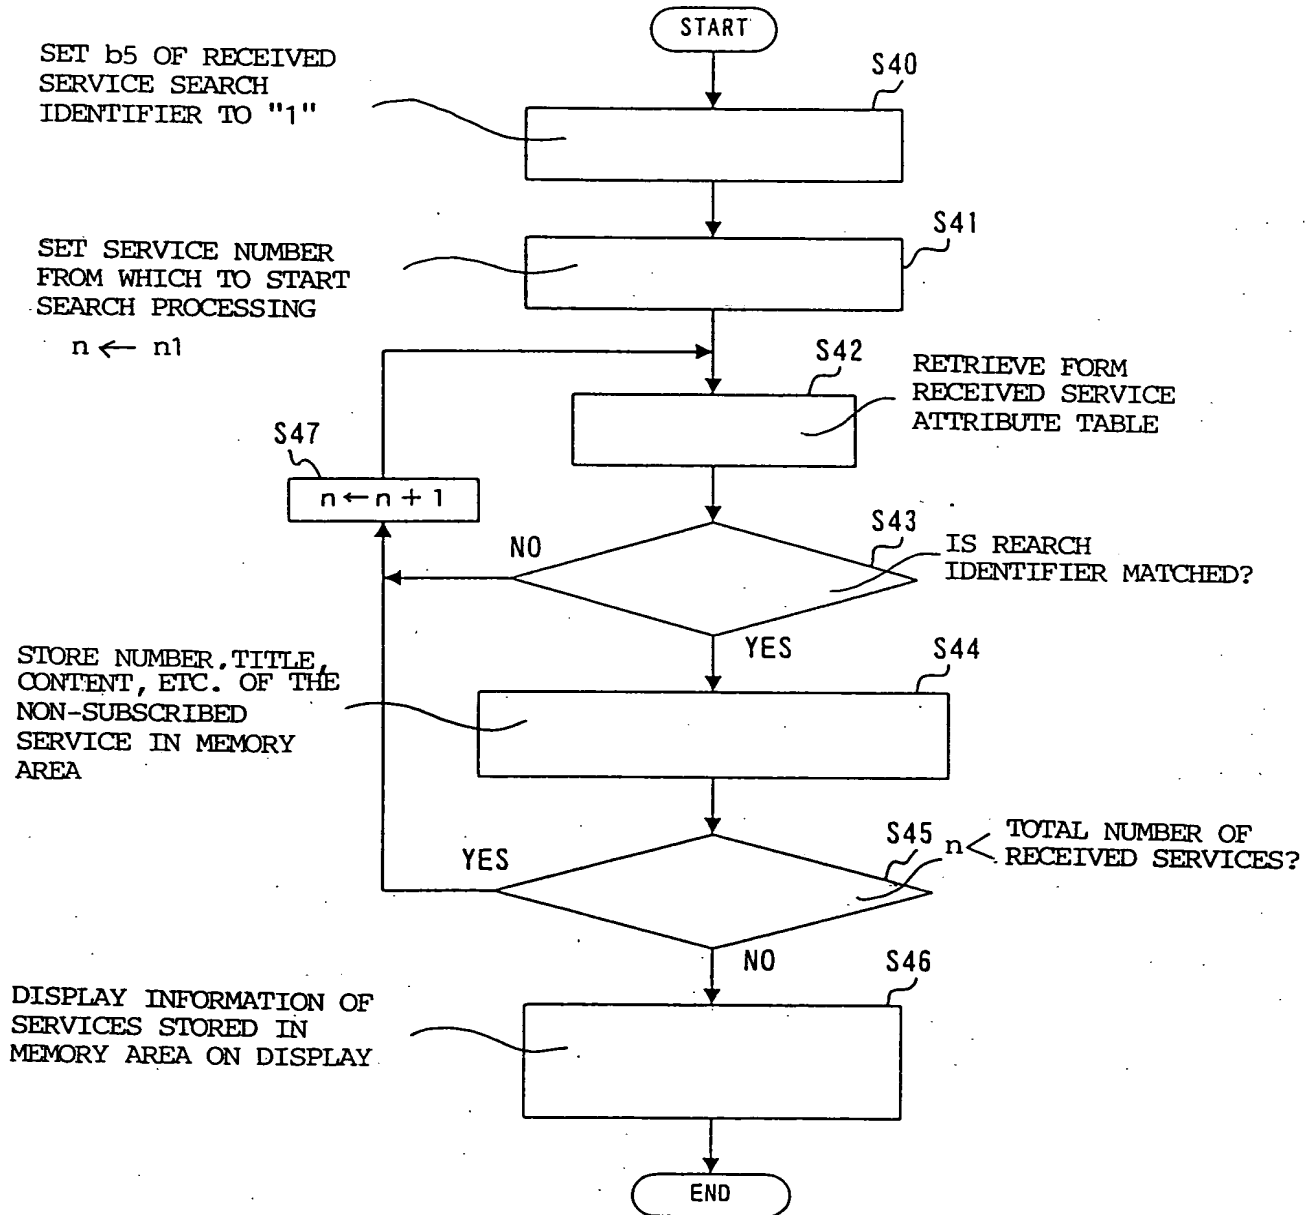


FIG. 7